

RAINBOW SERIES


Provision-ISR's Rainbow cameras, equipped with CNV (ColorNight Vision) technology, yield sharp and superior colors even in poor light conditions, providing visual details that significantly contribute to identifying people or objects.



BSV-320AR-28

2MP 24/7 FULL-COLOR FIXED LENS BULLET CAMERA

The rainbow camera series is equipped with super light-sensitive sensors that allow the camera to provide a color image throughout the day. When the ambient light is insufficient, the camera will turn on the integral lighting, allowing it to continue providing a full-color image. Featuring 4in1 technology, the camera is ideal for Plug & Play over existing analog infrastructure. With its outstanding performance, reliability, and affordable price, the BSV-320AR-28 camera is the perfect solution for basic installations.



MAIN FEATURES

- 2MP
- RAINBOW
- Pro series
- 1920x1080 Resolution
- 105.2° field of view
- IP67
- 4 in 1 (AHD/TVI/CVI/CVBS + PAL/NTSC)
- COC support




SPECIFICATIONS

Image Sensor	1/2.8" 2MP Sensor
Image Format	16:9
Effective Pixels	1920 x 1080
Scanning System	Progressive
Resolution	2MP: 1920x1080 AHD/TVI/CVI 1MP: 1280x720 AHD/TVI/CVI CVBS: 1000TVL
FPS	25/30FPS
Min. Illumination	0 lux with LED
D&N	24/7 Full-Color Day Mode
IR LED	N/A
OSD Menu	Available via CoC only
CoC Support	Yes
Day & Night Mode	24/7 Full-Color Day Mode only
Backlight Compensation	BLC/HLC
S/N Ratio	≥52dB (AGC off)
White Balance	Auto/Manual
Noise Reduction	2D-DNR
Video Output	2MP / 1MP (Selected by OSD Menu) AHD/TVI/CVI/CVBS + PAL/NTSC
Privacy Mask	No
D-Effect	N/A
WDR	Digital
Lens (Field Of View)	2.8mm Mega-Pixel Fixed (105.2°)
Power	DC12V/300mA
Operation Temperature	-30°C ~ 50°C, 10% ~ 90% humidity

SPECIFICATIONS

Protection Rate	IP67
Dimensions	172.2*73.4*74.5mm
Net Weight	~475g
Junction Box	PR-JB12IP66 - PR-JB12IP64


DIMENSIONS

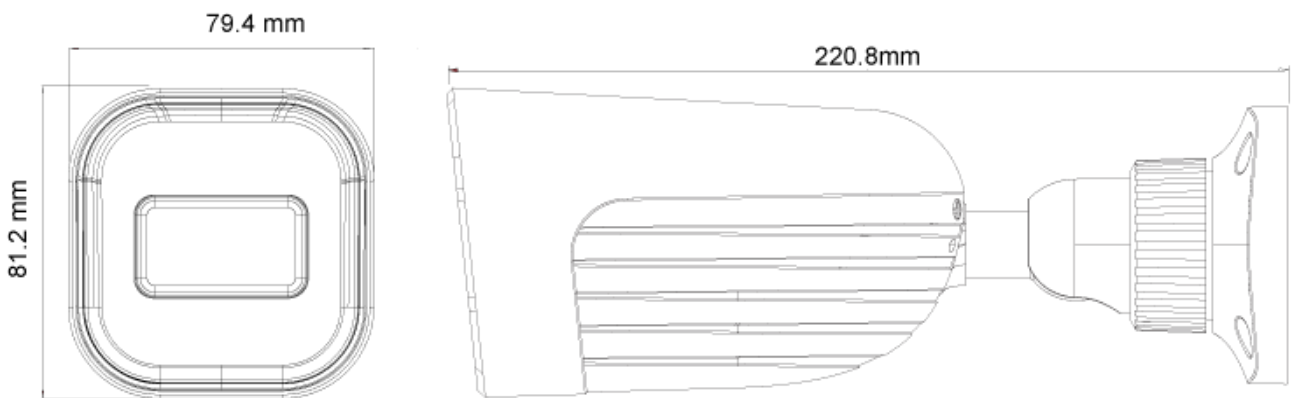

ACCESSORIES



PR-JB12IP66



PR-JB12IP64